

Светильник DL160x160A-11W White

Features:


- Size: 160*160*12mm (112 LEDs)
- Colour: White
- Net weight: 295g
- LED package: 3528
- Printed circuit board thickness: 0.2mm
- PCB material: FPC
- Cold-rolled plate as the bottom with aluminum + PMMA cover
- Energy-saving, high brightness, long lifespan, environmental protection, safe
- free of mercury and other harmful material
- Easy for installation
- 2 Years Warranty



Product Features:

Input voltage(AC)	85~265V
Working current	300mA
Working voltage(DC)	36V
Power	11W
Luminous flux	650±50 Lm
Color temperature	5500-7500 K
Dimensions	160*160*12mm
Working temperature	-30~+50 °C
Storage humidity	10% ~ 90% RH
Power factor	0.8±0.05(With power)
LED view angle (2θ1/2)	120°

Dimension (Unit:mm):

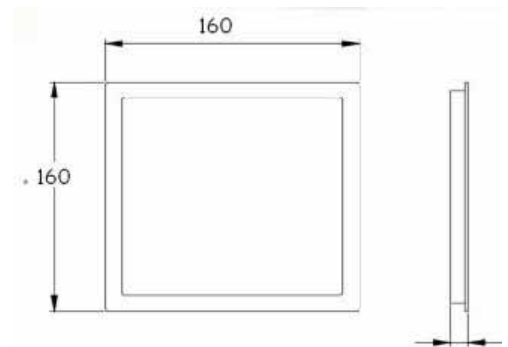


Note: Absolute maximum rating at TA=25°C


Application:

- Hotels
- Conference / Meeting rooms
- Factories & Offices
- Commercial Purposes.
- Residential / Institution Buildings
- Schools, Colleges & Universities

Photometric curve:

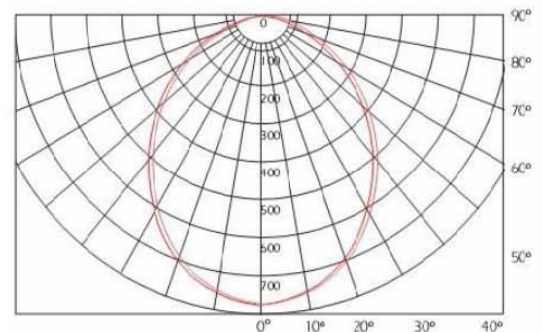

Package:

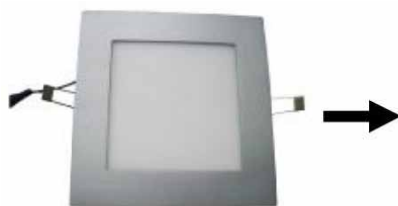

1 pcs



1pcs / carton

Illumination table:

Height	LUX
1m	185
2.0m	52
2.5m	36
3.0m	25

Note: The above parameters are for reference only, are subject to change without further notice